

LED DOWNLIGHT BRIZIO

Introducing the ROCHLUX COB Cylinder Surface Down Light the perfect lighting solution for those who want to add a touch of elegance and sophistication to their indoor spaces. With its sleek and modern design, this downlight is perfect for illuminating any room in your home or office. Featuring high-quality COB LED technology, the ROCHLUX COB Cylinder Surface Down Light delivers exceptional brightness and clarity, ensuring that your indoor spaces are well-lit and inviting at all times. And with its powerful power supply, it is capable of providing long-lasting illumination without the need for frequent bulb replacements.

The cylinder shape and surface-mounted design of this downlight make it easy to install in any indoor space, providing a sleek and streamlined look that is sure to impress. And with its durable and long-lasting construction, it is sure to provide reliable performance for years to come.




FEATURES:


Brand	ROCHLUX
Model no:	R842212 / R842318 / R842430 R842540 / R842648 / R842760
Power :	12W/18W/30W/40W/48W/60W
Input :	AC85-265V , 50 /60 HZ
Temperature range :	-20-50°C
Light source :	COB
Lumen :	80-110 LM/W
Colour Temperture :	3000K - 6500K/CCT
Colour Rendering Index :	CRI>80
Beam angle :	12°/24°/38°/60°
Power factor :	Pf>0.5 / Pf>0.9
Power efficiency :	92%
Housing material :	Die-casting Aluminium
Optical material:	Reflective cup+Lens
Lighning protection :	1.5-4KV
Protection class :	IP20

5 Years Warranty





3m (h)




Ø0.42m(d) Ø0.79m(d) Ø1.28m(d) Ø2.07m(d) Ø3.46m(d)

12°



12W

3000K




h(m)	E(lx)	D(m)
1	2360	0.33
2	590	0.66
3	262	0.99
4	148	1.32
5	94	1.65

24°




12W

3000K




h(m)	E(lx)	D(m)
1	1738	0.44
2	434	0.88
3	193	1.32
4	109	1.76
5	70	2.19

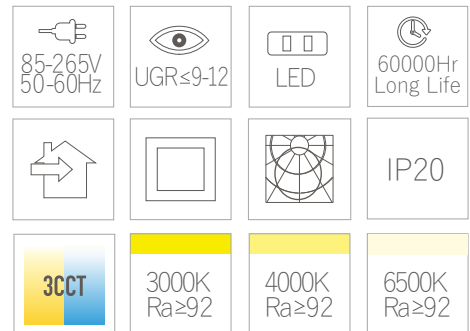

LED Chips




LED Drivers

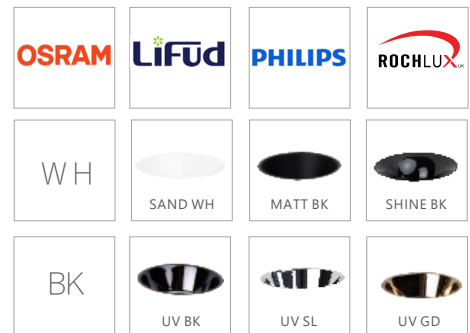

MODEL :
R842212

75mm


Ø 73.5mm



MODEL :
R842318

95mm


Ø 95mm



MODEL :
R842430

120mm


Ø 120mm



MODEL :
R842540

140mm


Ø 140mm



MODEL :
R842648

160mm

Ø 160mm



MODEL :
R842760

190mm

Ø 190mm

