



WALKOVER LIGHT UG BRUNO

Recessed inground lights, also known as in-ground or well lights, are outdoor lighting fixtures installed flush with the ground. They are designed for accent and decorative lighting, highlighting architectural features, landscaping, or pathways. These lights are often used to create a dramatic effect and enhance the overall aesthetics of an outdoor space.

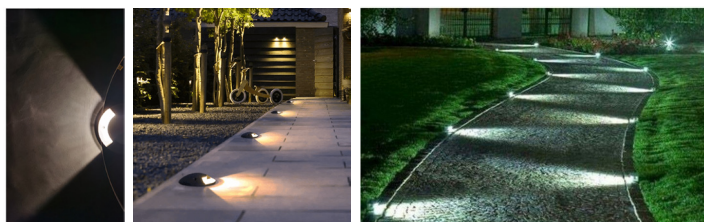

PRODUCT ADVANTAGES AND FEATURES

- ◆ Concealed and Low-Profile: In-ground lights are designed to be discreet, minimizing their visual impact and maintaining a clean aesthetic.
- ◆ Permanent and Durable: Once installed, they are typically permanent fixtures, offering long-lasting outdoor lighting solutions.
- ◆ Versatile Applications: They can be used for various purposes, including accent lighting, floodlighting, wallwashing, and grazing light.
- ◆ Weather-Resistant: They are designed to withstand the elements and are often equipped with waterproof features to prevent damage from rain, snow, and other weather conditions.

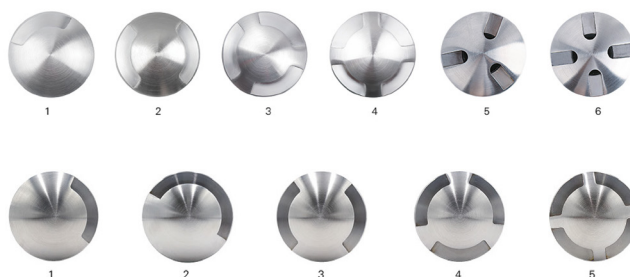

Products parameter

	Product Name :	WALKOVER LIGHT UG BRUNO
	Model Number :	R847703
	Item Code :	RGN-42
	Power :	3W
	Driver :	KEGU/DONE
Electric Data	Input :	AC110-240V , 50 /60 HZ
	Power factor :	Pf>0.9
	Flicker :	Flicker Free
	Power Efficiency :	90%
Photometric Specifications	Light source :	CREE LED / OSRAM
	Lumen Efficiency (±5%) :	60lm/W
	Colour Temperture :	2700k-3000k-4000k-6000k-RGB
	Colour Rendering Index :	CRI>80
	IK Rating :	IK10
Mechanical Specifications	Working Environment :	- 20°C / +50°C 20%-80% humidity
	Body :	Die-casting Aluminium with PC
	Cover :	Stainless Steel Cover 316/304
	Protection class :	IP67
	Body color :	Black
	Life time :	50000h
	Type Shapes :	Round

5 Years Warranty

 220-240V 50-60Hz	 Angle 30°	 50000Hr Long Life	 60Lm/W
 Stainless steel	 Pf>0.95	 IK10	 IP67
2700K Ra≥80	3000K Ra≥80	4000K Ra≥80	6000K Ra≥80



LED Chips

			
---	---	---	---

LED Drivers

			
---	---	---	---



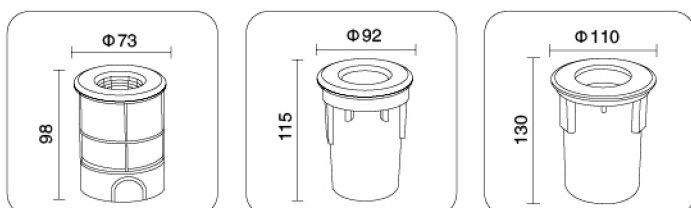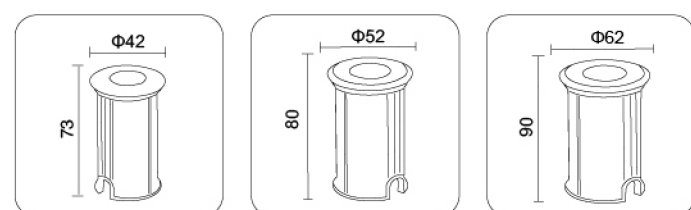


Technical Parameter

Item Code	RGN-42	RGN-52	RGN-62
Size	Φ42*H73mm	Φ52*H80mm	Φ62*H90mm
Rated Power	1W		
Input Voltage	12V/24V/220/50-60Hz		
Hole Size	Φ40*H75mm	Φ48*H85mm	Φ55*H95mm
N.W/G.W	0.2kg/0.23kg	0.25kg/0.28kg	0.35kg/0.38kg
Packing Size	30.5*30.5*18cm/50pcs	33.5*33.5*21.5cm/50pcs	36*36*23cm/50pcs

Technical Parameter


Item Code	RGN-73	RGN-92	RGN-110
Size	Φ73*H98mm	Φ92*H115mm	Φ110*H130mm
Rated Power	3W		
Input Voltage	12V/24V/220/50-60Hz		
Hole Size	Φ68*H100mm	Φ87*H120mm	Φ105*H140mm
N.W/G.W	0.6kg/0.64kg	0.9kg/0.98kg	1.1kg/1.3kg
Packing Size	42.5*25.5*26cm/30pcs	51.5*21.5*28.5cm/20pcs	58*24*35.5cm/20pcs



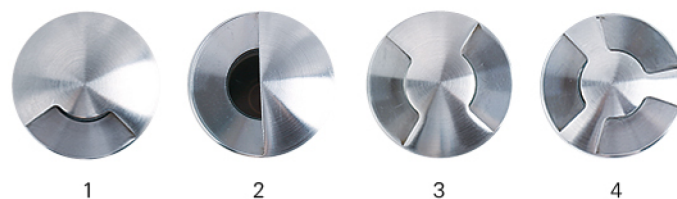


Technical Parameter

Item Code	RGN-42	
Size	$\Phi 42 \times H95\text{mm}$	$\Phi 42 \times H80\text{mm}$
Rated Power	1W	
Input Voltage	12V/24V/220/50-60Hz	
Hole Size	$\Phi 38 \times H85\text{mm}$	$\Phi 40 \times H75\text{mm}$
N.W/G.W	0.26kg/0.29kg	
Packing Size	33.5*33.5*21.5cm/50pcs	

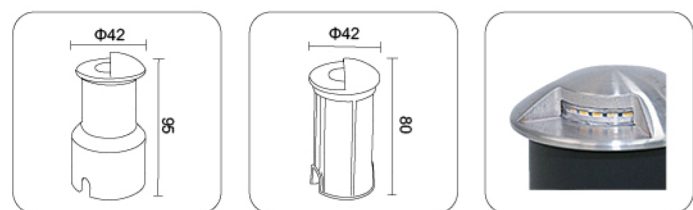

Technical Parameter

Item Code	RGN-52	
Size	$\Phi 52 \times H96\text{mm}$	$\Phi 52 \times H90\text{mm}$
Rated Power	1W	
Input Voltage	12V/24V/220/50-60Hz	
Hole Size	$\Phi 41 \times H90\text{mm}$	$\Phi 48 \times H85\text{mm}$
N.W/G.W	0.31kg/0.34kg	
Packing Size	33.5*33.5*21.5cm/50pcs	

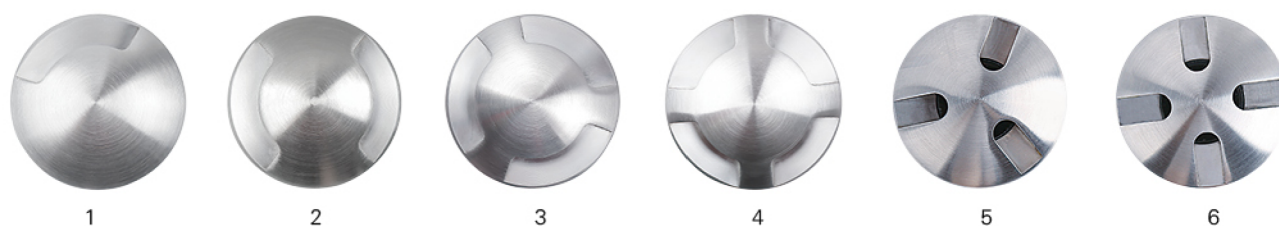




- ◆ Chip: Epistar/Bridgelux/Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover+body, Tempered glass or PC cover, ABS box

Technical Parameter

Item Code	RGN-62	
Size	Φ62*H110mm	Φ62*H100mm
Rated Power	1W	
Input Voltage	12V/24V/220/50-60Hz	
Hole Size	Φ53*H100mm	Φ55*H90mm
N.W/G.W	0.38kg/0.41kg	
Packing Size	36*36*23cm/50pcs	

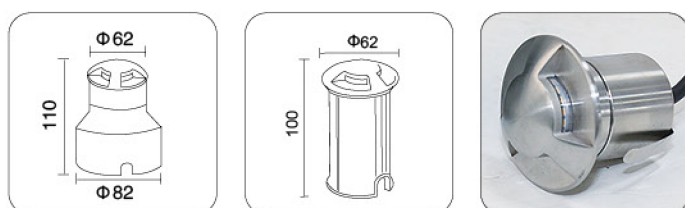

1



2



3



4



5



6




- ◆ Chip: Epistar/Bridgelux/Cree
- ◆ CCT: 3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover+body, Tempered glass or PC cover, ABS box

Technical Parameter


Item Code	RGN-73	
Size	Φ73*H115mm	
Rated Power	3W	
Input Voltage	12V/24V/220/50-60Hz	
Hole Size	Φ68*H100mm	
N.W/G.W	0.68kg/0.73kg	
Packing Size	42.5*25.5*26cm/30pcs	



1



2



3



4





5




- ◆ Chip: Bridgelux/Cree
- ◆ CCT: 2700K /3000K /4000K /6000K/R/G/B
- ◆ Material: Stainless steel cover+body,Tempered glass or PC cover,ABS box

Technical Parameter

Model	R847703
Item Code	RGN-921
Size	Φ92*H125mm
Rated Power	3W
Input Voltage	12V/24V/220/50-60Hz
Hole Size	Φ87*H115mm
N.W/G.W	1.07kg/1.12kg
Packing Size	51.5*21.5*28.5cm/20pcs




1




2



3




4




5




6




7




8




9



10



11



Technical Parameter

Model	R847703
Item Code	RGN-110
Size	Φ110*H150mm
Rated Power	3W
Input Voltage	12V/24V/220/50-60Hz
Hole Size	Φ105*H140mm
N.W/G.W	1.66kg/1.7kg
Packing Size	58*24*35.5cm/20pcs



RGN-A55





RGN-A20



RGN-A35



- ◆ Chip: Cree/Osram/Epistar
- ◆ CCT: 3000K/4000K/6000K
- ◆ Material: Aluminum body+Stainless steel cover+Glass(Clear/Frosted)
- ◆ Input Voltage: DC12V/DC24V

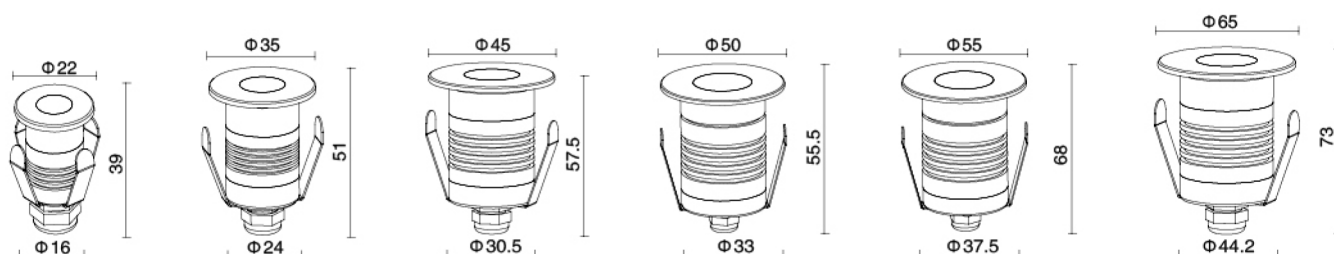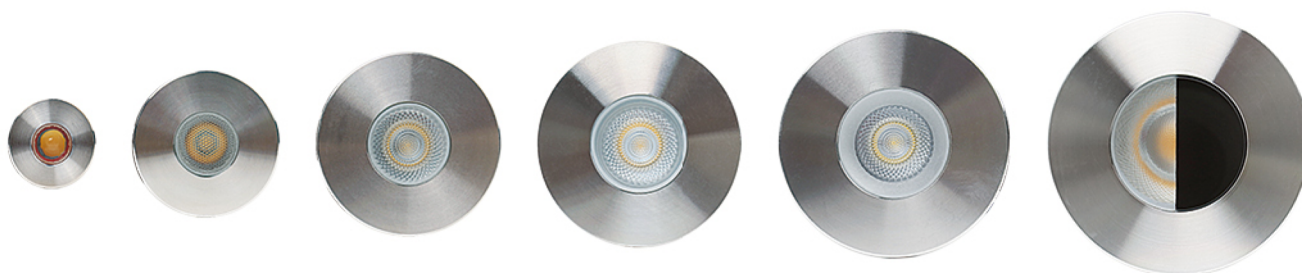

Technical Parameter

Model	Size(mm) with box		RatedPower	Hole Size(mm)	Angle(LENS)
	Φ	H			
RGN-A20	22	39	0.7W SMD Epistar	Φ20*H45	120°
RGN-A35	35	71	2W LED Osram	Φ32*H75	30°
RGN-A45	45	79	3W LED Cree	Φ41*H85	15/30/45/60°
RGN-A50	50	76	3W LED Cree	Φ45*H80	15/30/45/60°
RGN-A55	55	89	3W LED Cree	Φ48*H95	15/30/45/60°
RGN-A65	65	92	5W COB Cree	Φ55*H100	36/50°