
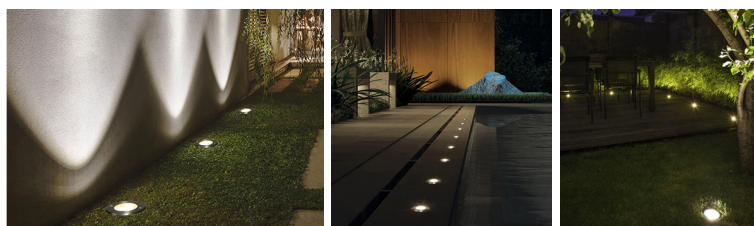



UNDERGROUND LIGHT LORIS

The Grand In-Ground Light is a high output luminaire with a tiltable adjustable beam angle and integral on-board dimmer. This durable fixture features corrosion-resistant aluminum alloy or die-cast brass construction and an IP67 rating. UG inground lights are durable outdoor lighting fixtures designed to be buried in the ground to illuminate walkways, landscaping, and architectural features. They are typically built to withstand harsh weather conditions, with features like a high IP rating for water and dust resistance, strong materials like stainless steel or aluminum, and tempered glass.

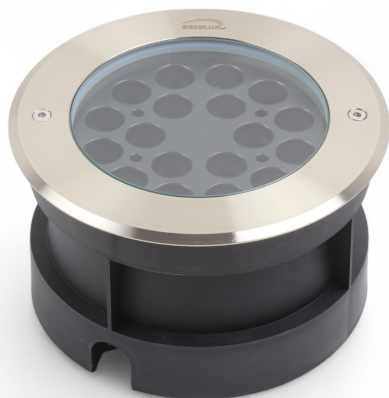

PRODUCT ADVANTAGES AND FEATURES

- ◆ Concealed and Low-Profile: In-ground lights are designed to be discreet, minimizing their visual impact and maintaining a clean aesthetic.
- ◆ Permanent and Durable: Once installed, they are typically permanent fixtures, offering long-lasting outdoor lighting solutions.
- ◆ Versatile Applications: They can be used for various purposes, including accent lighting, floodlighting, wallwashing, and grazing light.
- ◆ Weather-Resistant: They are designed to withstand the elements and are often equipped with waterproof features to prevent damage from rain, snow, and other weather conditions.



5 Years Warranty

Products parameter

Product Name :		UNDERGROUND LIGHT LORIS
Electric Data	Model Number :	R843106
	Power :	6W
	Driver :	KEGU / DONE
	Input :	AC220-240V , 50 /60 HZ
	Input Optional :	DC24V
	Power factor :	Pf>0.9
	Flicker :	Flicker Free
	Power Efficiency :	90%
Photometric Specifications	Function Optional :	DALI /0-10V /DMX512
	Light source :	CREE LED / OSRAM
	Lumen Efficiency (±5%) :	60lm/W
	Colour Temperture :	3000K/4000K/6500K
	Colour Rendering Index :	CRI>80
	Beam angle :	6°/15°/30°/45°/60°
	IK Rating :	IK10
Mechanical Specifications	Working Environment :	- 20°C / +50°C 20%-80% humidity
	Material :	Stainless Steel Cover
	Protection class :	IP67
	Body color :	Black
	Life time :	50000h
Type Shapes :		Round

 AC220-240V 50-60Hz	 Angle 30°	 50000Hr Long Life	 60Lm/W
 Stainless steel	 Pf>0.9	 IK10	 IP67
 3CCT	 3000K Ra≥80	 4000K Ra≥80	 6500K Ra≥80

LED Chips

			
--	---	---	---

LED Drivers

			
--	---	---	---

Technical Parameter


Model Number	Item Code	Power	Driver	Input	Light source	Color Temperature	Beam Angle	Hole Size	Product Size	N.W(Kg)
R843106	RCC - 100S	6W	KEGU	AC220-240V 50/60 HZ	CREE LED/ OSRAM	3K/ 4K/ 6.5K	6° /15° /30° /45° /60°	Ø92xH140	Ø100mm x H130mm	0.85
R843112	RCC - 130S	12W	DONE	AC110-240V 50/60 HZ	CREE LED/ OSRAM	3K/ 4K/ 6.5K	6° /15° /30° /45° /60°	Ø121xH135	Ø130mm x H130mm	1.3
R843218	RCC - 160S	18W	DONE	AC110-240V 50/60 HZ	CREE LED/ OSRAM	3K/ 4K/ 6.5K	6° /15° /30° /45° /60°	Ø145xH145	Ø160mm x H140mm	2
R843324	RCC - 180S	24W	DONE	AC110-240V 50/60 HZ	CREE LED/ OSRAM	3K/ 4K/ 6.5K	6° /15° /30° /45° /60°	Ø167xH150	Ø180mm x H145mm	2.5
R843336	RCC - 210S	36W	DONE	AC110-240V 50/60 HZ	CREE LED/ OSRAM	3K/ 4K/ 6.5K	6° /15° /30° /45° /60°	Ø195xH140	Ø210mm x H130mm	2.7
R843348	RCC - 260S	48W	DONE	AC110-240V 50/60 HZ	CREE LED/ OSRAM	3K/ 4K/ 6.5K	6° /15° /30° /45° /60°	Ø241xH160	Ø260mm x H155mm	5.2




PRODUCT PARAMETER




6W




12W




18W



24W



36W



48W

