




WALKOVER LIGHT UG FLORA

Recessed inground lights, also known as in-ground or well lights, are outdoor lighting fixtures installed flush with the ground. They are designed for accent and decorative lighting, highlighting architectural features, landscaping, or pathways. These lights are often used to create a dramatic effect and enhance the overall aesthetics of an outdoor space.

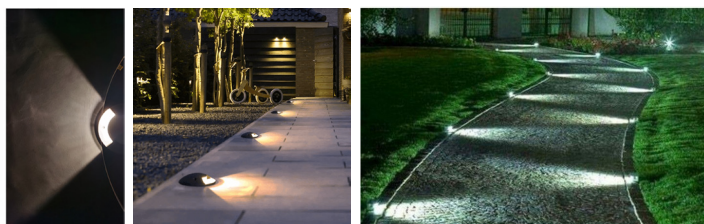

PRODUCT ADVANTAGES AND FEATURES

- ◆ Concealed and Low-Profile: In-ground lights are designed to be discreet, minimizing their visual impact and maintaining a clean aesthetic.
- ◆ Permanent and Durable: Once installed, they are typically permanent fixtures, offering long-lasting outdoor lighting solutions.
- ◆ Versatile Applications: They can be used for various purposes, including accent lighting, floodlighting, wallwashing, and grazing light.
- ◆ Weather-Resistant: They are designed to withstand the elements and are often equipped with waterproof features to prevent damage from rain, snow, and other weather conditions.



1T



2T



3T



4T



5T







6T

Products parameter

Electric Data	Product Name :	WALKOVER LIGHT UG FLORA
	Model Number :	R842803-1T
	Power :	3W
	Driver :	KEGU/DONE
	Input :	AC220-240V , 50 /60 HZ
	Power factor :	Pf>0.9
	Flicker :	Flicker Free
	Power Efficiency :	90%
Photometric Specifications	Light source :	CREE LED / OSRAM
	Lumen Efficiency (±5%) :	60lm/W
	Colour Temperture :	2700K-3000K-4000K-6500K/R/G/B
	Colour Rendering Index :	CRI>80
	IK Rating :	IK10
Mechanical Specifications	Working Environment :	- 20°C / +50°C 20%-80% humidity
	Body :	Die-casting Aluminium with PC
	Cover :	Stainless steel Cover
	Protection class :	IP67
	Body color :	Black
	Life time :	50000h
	Type Shapes :	Round

5 Years Warranty



LED Chips



LED Drivers




Technical Parameter


Model Number	Item Code	Power	Driver	Light Ways	Light soure	Colour Temperture	Color Rendering Index	Beam Angle	Protection Class	Product Size
R842803	RCC - 100J	3W	KEGU / DONE	1T	CREE LED/ OSRAM	3K /4K /6.5K/ R/G/B	CRI>80	30°	IP67	Ø105mm x H100mm
R842806	RCC - 130J	6W	KEGU / DONE	1T	CREE LED/ OSRAM	3K /4K /6.5K/ R/G/B	CRI>80	30°	IP67	Ø120mm x H110mm
R842810	RCC - 150J	10W	KEGU / DONE	1T	CREE LED/ OSRAM	3K /4K /6.5K/ R/G/B	CRI>80	30°	IP67	Ø145mm x H145mm
R842808	RCC - 200J	One Side: 4W Two Side: 8W	KEGU / DONE	1T	CREE LED/ OSRAM	3K /4K /6.5K/ R/G/B	CRI>80	30	IP67	Ø195mm x H165mm




PRODUCT PARAMETER




R842803-3W



R842806-6W



R842810-10W



R842808-8W/4W

