


LED MODULAR SPOT LIGHT GALLO



The Modular Spot Light is a versatile architectural lighting solution designed for modern commercial and residential applications. Its modular construction allows the light source and mounting housing to be combined for flexible installation requirements. Available in multiple wattages, beam angles, and color temperatures, it provides precise and comfortable illumination. The adjustable and fixed housing options allow accurate light direction for different interior spaces. High-quality optical components deliver efficient light output with excellent visual performance. Its compact design and clean finish make it ideal for retail stores, showrooms, hotels, offices, galleries, and premium interiors.



PRODUCT ADVANTAGES AND FEATURES

- ◆ Modular Design – Interchangeable light module and housing system for flexible installation.
- ◆ Multiple Power Options – Available in 9W/15W and 20W/32W configurations.
- ◆ Selectable CCT Options – Available in 300K, 4000K, 6500K, with 3CCT versions.
- ◆ Multiple Beam Angles – 15° / 24° / 36° / 55° options for precise light distribution.
- ◆ Adjustable & Fixed Housings – Compatible with adjustable and fixed recessed mounting accessories.
- ◆ Premium Optical Performance – Available with Bridgelux V8/V10B or COB light source options for reliable and efficient illumination.
- ◆ High Visual Comfort – Designed with ≥ 92 CRI options for accurate color rendering and enhanced visual quality.
- ◆ Premium Housing Finish – Durable grey-finished body with compatible white/black recessed housing options for modern interior applications.

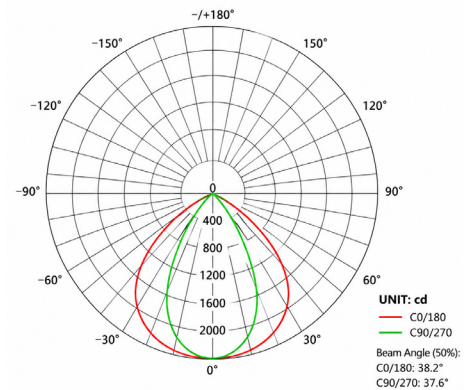

Products parameter

	Product Name :	SPOT LIGHT GALLO
Electric Data	Model Number :	R840609
	Power :	9W
	Driver :	EAGLERISE
	Input :	AC85-265V , 50 /60 HZ
	Power factor :	Pf>0.9
	Driver Options :	On/Off /0-10V / Dali / Triac Dimmer/ Zigbee
	Power Efficiency :	92%
Photometric Specifications	Light source :	COB
	Lumen Efficiency (±5%)	95lm/W - 110lm/W
	Colour Temperature :	3000k-4000k-6500k
	Colour Rendering Index :	CRI>92
Mechanical Specifications	Beam angle :	15°/24°/36°/55°
	Temperature range :	20-50°C
	Housing material :	Die-casting Aluminium
	Optical material:	Reflective Cup
	Lighning protection :	1.5-4KV
	Protection class :	IP65/IP54
	Body color :	White, Black
	Life time :	50000h
	Type Shapes :	Round, Square

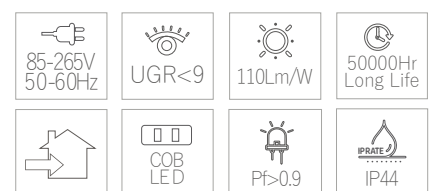

LED Chips



LED Drivers



Technical Parameter

Model Number	Item Code	Power	Driver	Input	Light Source	Color Temperature	Beam Angle	Protection Class	Product Size
R840609	RB1016R-001-M09	9W	EAGLERISE	AC85-265V 50/60 HZ	COB	3K/4K/6.5K	20°/30°/38°/50°	IP65	Ø 55x57mm
R840615	RB1017R-001-L15	15W	EAGLERISE	AC85-265V 50/60 HZ	COB	3K/4K/6.5K	20°/30°/38°/50°	IP65	Ø 55x80mm
R840620	RB1018R-001-L24	20W	EAGLERISE	AC85-265V 50/60 HZ	COB	3K/4K/6.5K	20°/30°/38°/50°	IP65	Ø 70x98mm
R840632	RB1004R-01	32W	EAGLERISE	AC85-265V 50/60 HZ	COB	3K/4K/6.5K	20°/30°/38°/50°	IP65	Ø 87x107mm

R840609
RB1016R-001-M09




R840615
RB1017R-001-L15




R840620
RB1018R-001-L24




RB1003R-P01-IP65

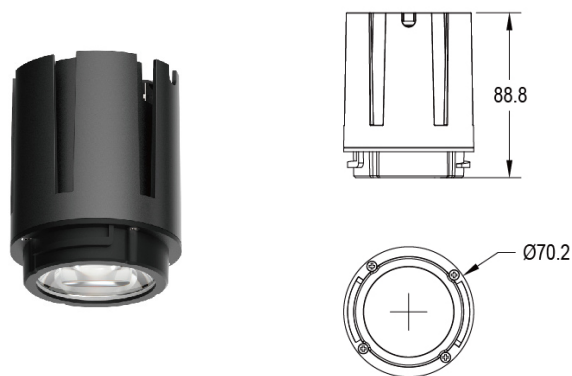


R840632
RB1004R-01

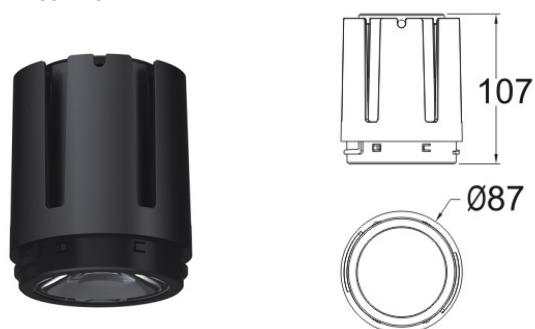



RB1005R-01

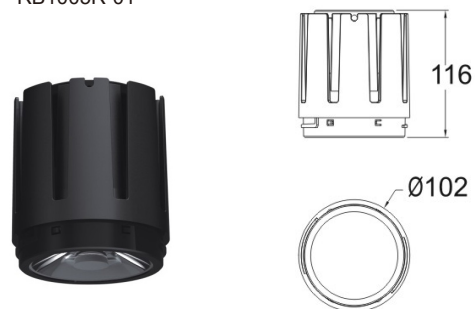



RT1003R-01 Adjustable




RT1003S-F001 Adjustable

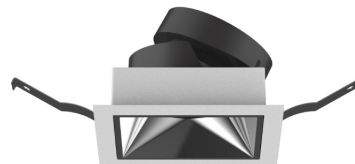


RT1003S-21 Adjustable

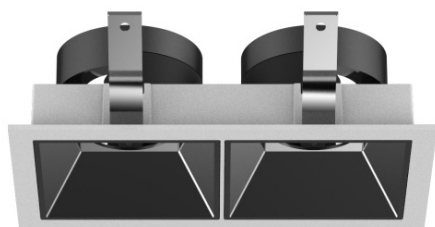


RT1003R-W01 Wall washer




RT1005R-01 Adjustable




RT1071R-03 Fixed IP54




RT1021R-01 Adjustable




RT2628R-001 Adjustable



RT2627R-002 Fixed

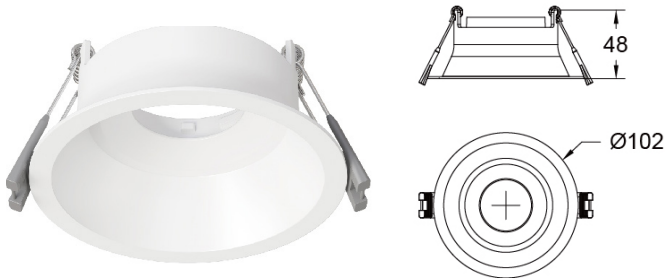


RT1102R-01 Adjustable

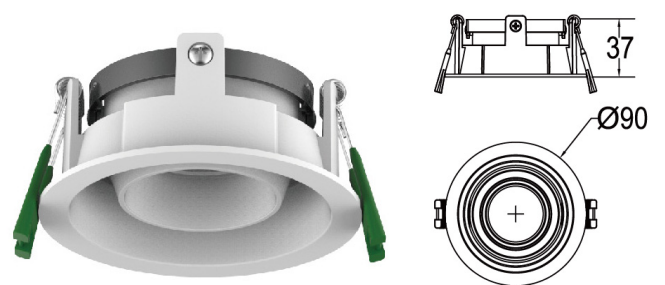


RT1102S-01 Adjustable




RT1102S-02 Adjustable

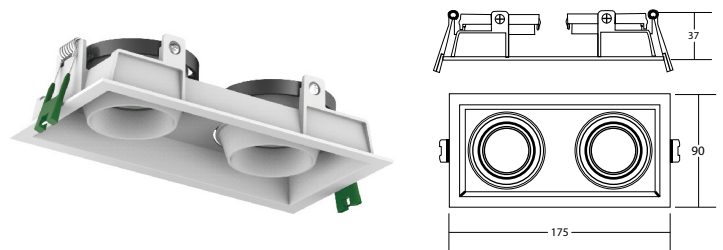


RT1006R-01 Adjustable

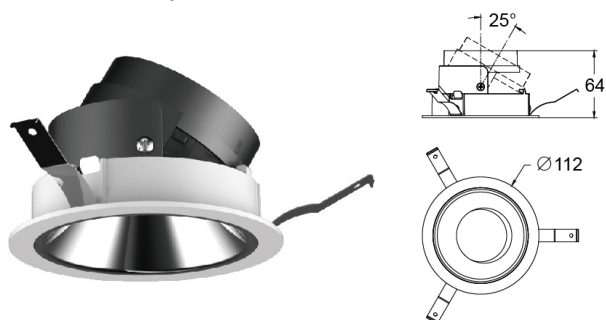


RT1006S-01 Adjustable

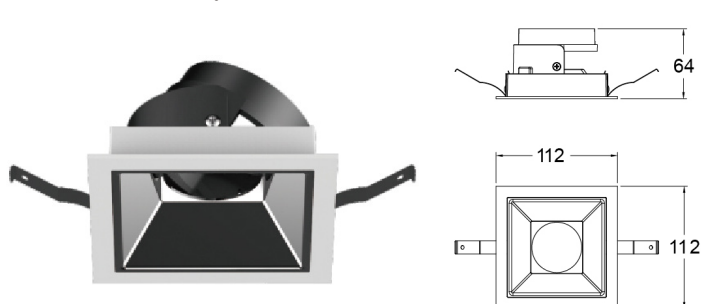


RT1024R-01 Adjustable

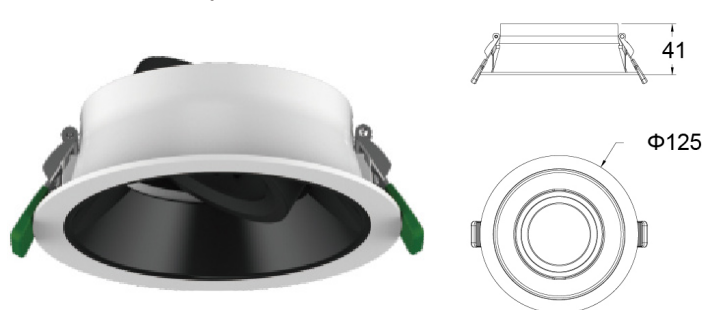


RT2013-001 Fixed

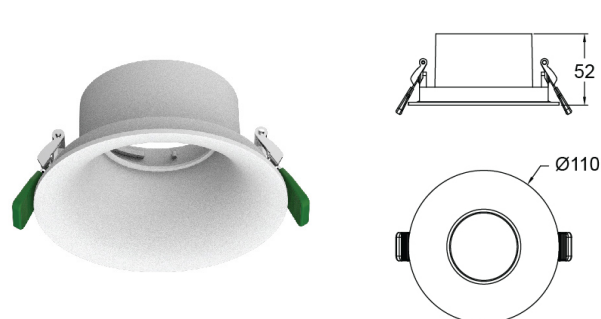


RT11103R-01 Adjustable

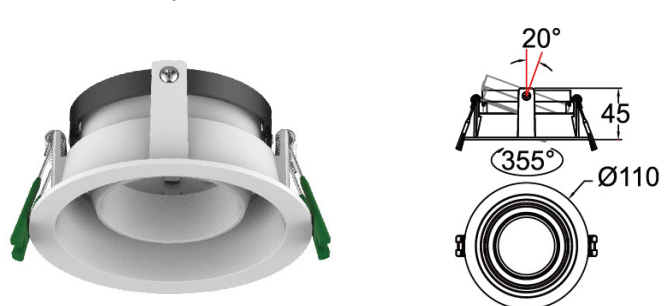

RT11103S-01 Fixed

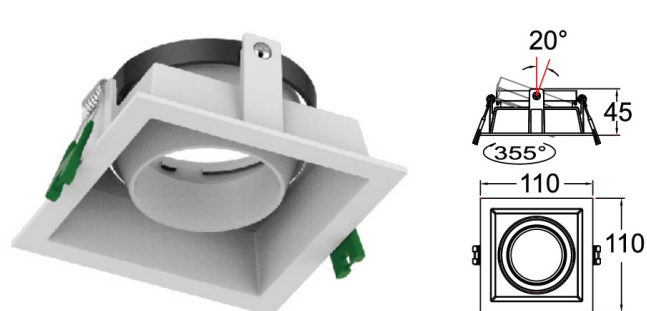


RT11103S-02 Fixed

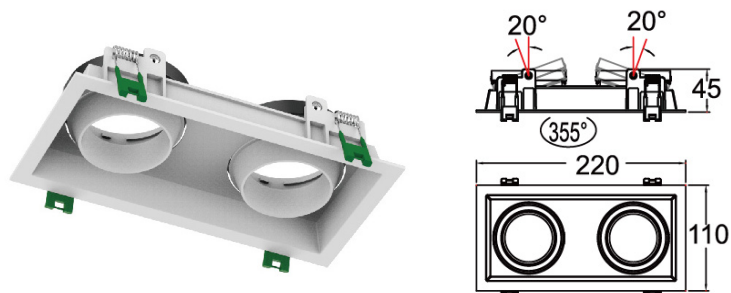


RT11103S-02 Fixed




RT1007S-01 Adjustable

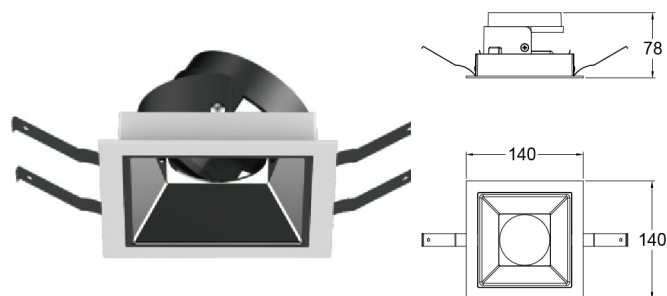


RT1025R-01 Adjustable

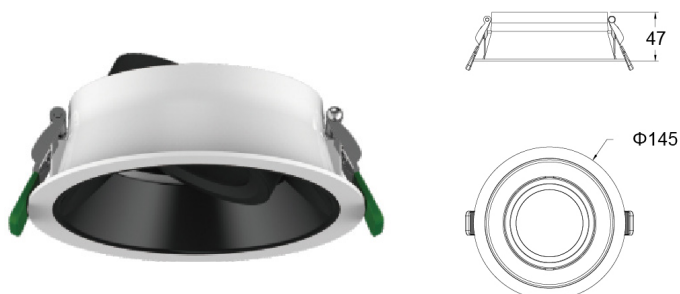


RT1104R-01 Adjustable

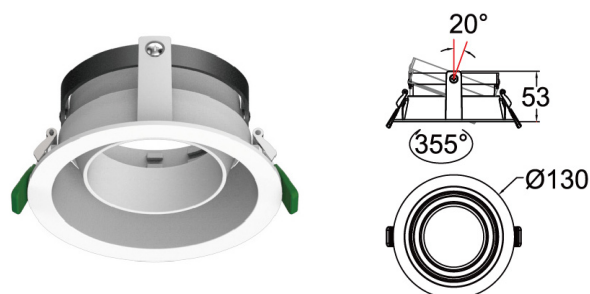

RT1104S-01 Adjustable

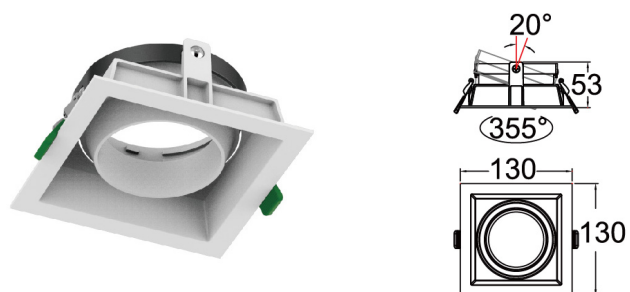

RT1104S-02 Adjustable

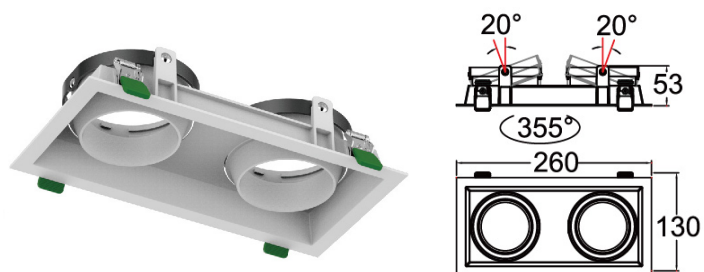

RT1008R-01 Adjustable



RT1008S-01 Adjustable

